Rexroth
Bosch Group

换向阀 → 线圈

系列 CO1

产品手册



换向阀 → 线圈
系列 CO1



	线圈, 系列 CO1 ► 线圈宽度 30 mm ► A 型	3
	线圈, 系列 CO1 ► 线圈宽度 22 mm ► B 型	5
	补充性产品, 系列 CO1 线圈	online

换向阀 → 线圈

线圈, 系列 CO1

► 线圈宽度 30 mm ► A 型



00135727

标准化电路接口	EN 175301-803, A型
电路接口	多芯插头
环境温度 最小值/最大值	-- / +50°C
防护等级 带有接线盒 / 插头	IP 65
暂载率ED	100 %
材料:	
外壳	热塑性橡胶

额定电压			电压容许误差			功率消耗	启动功率		保持功率	
DC	AC 50 Hz	AC 60 Hz	DC	AC 50 Hz	AC 60 Hz	DC	AC 50 Hz	AC 60 Hz	AC 50 Hz	AC 60 Hz
						W	VA	VA	VA	VA
12 V	-	-	-10% / +10%	-	-	2,1	-	-	-	-
24 V	-	-	-10% / +10%	-	-	2,1	-	-	-	-
-	24 V	24 V	-	-20% / +10%	-10% / +20%	-	6,9	5,6	4,2	3,2
48 V	-	-	-10% / +10%	-	-	2,2	-	-	-	-
-	110 V	110 V	-	-20% / +10%	-10% / +20%	-	6,9	5,8	4,2	3,2
-	240 V	240 V	-	-20% / +10%	-10% / +20%	-	6,9	5,8	4,2	3,2
24 V	-	-	-10% / +10%	-	-	2,7	-	-	-	-
-	24 V	24 V	-	-20% / +10%	-10% / +20%	-	-	-	5,2	3,9
-	110 V	110 V	-	-20% / +10%	-10% / +20%	-	-	-	4,8	3,6
-	230 V	230 V	-	-20% / +10%	-10% / +20%	-	-	-	5,6	4,2
12 V	24 V	24 V	-10% / +10%	-10% / +10%	-10% / +10%	6,2	11,5	9,5	7,4	5,2
24 V	-	-	-10% / +10%	-10% / +10%	-10% / +10%	4,4	-	-	-	-
-	110 V	110 V	-	-10% / +10%	-10% / +10%	-	11,5	10,8	8	6,4
110 V	220 V	230 V	-10% / +10%	-10% / +10%	-10% / +10%	6	11,5	12,6	8	9,1


换向阀 → 线圈

线圈, 系列 CO1

► 线圈宽度 30 mm ► A 型

	额定电压			兼容性目录	重量	产品代码
	DC	AC 50 Hz	AC 60 Hz			
					[kg]	
	12 V	-	-	13	0,096	**5420507012**
	24 V	-	-	13	0,096	**5420507022**
	-	24 V	24 V	13	0,096	**5428457022**
	48 V	-	-	13	0,096	**5420507032**
	-	110 V	110 V	13	0,096	**5428457072**
	-	240 V	240 V	13	0,096	**5428457112**
	24 V	-	-	14	0,096	**5420897022**
	-	24 V	24 V	14	0,096	**5428117022**
	-	110 V	110 V	14	0,096	**5428117072**
	-	230 V	230 V	14	0,096	**5428117082**
	12 V	24 V	24 V	15	0,11	**1824210222**
	24 V	-	-	15	0,11	**1824210223**
	-	110 V	110 V	15	0,11	**1824210221**
	110 V	220 V	230 V	15	0,11	**1824210220**

规格

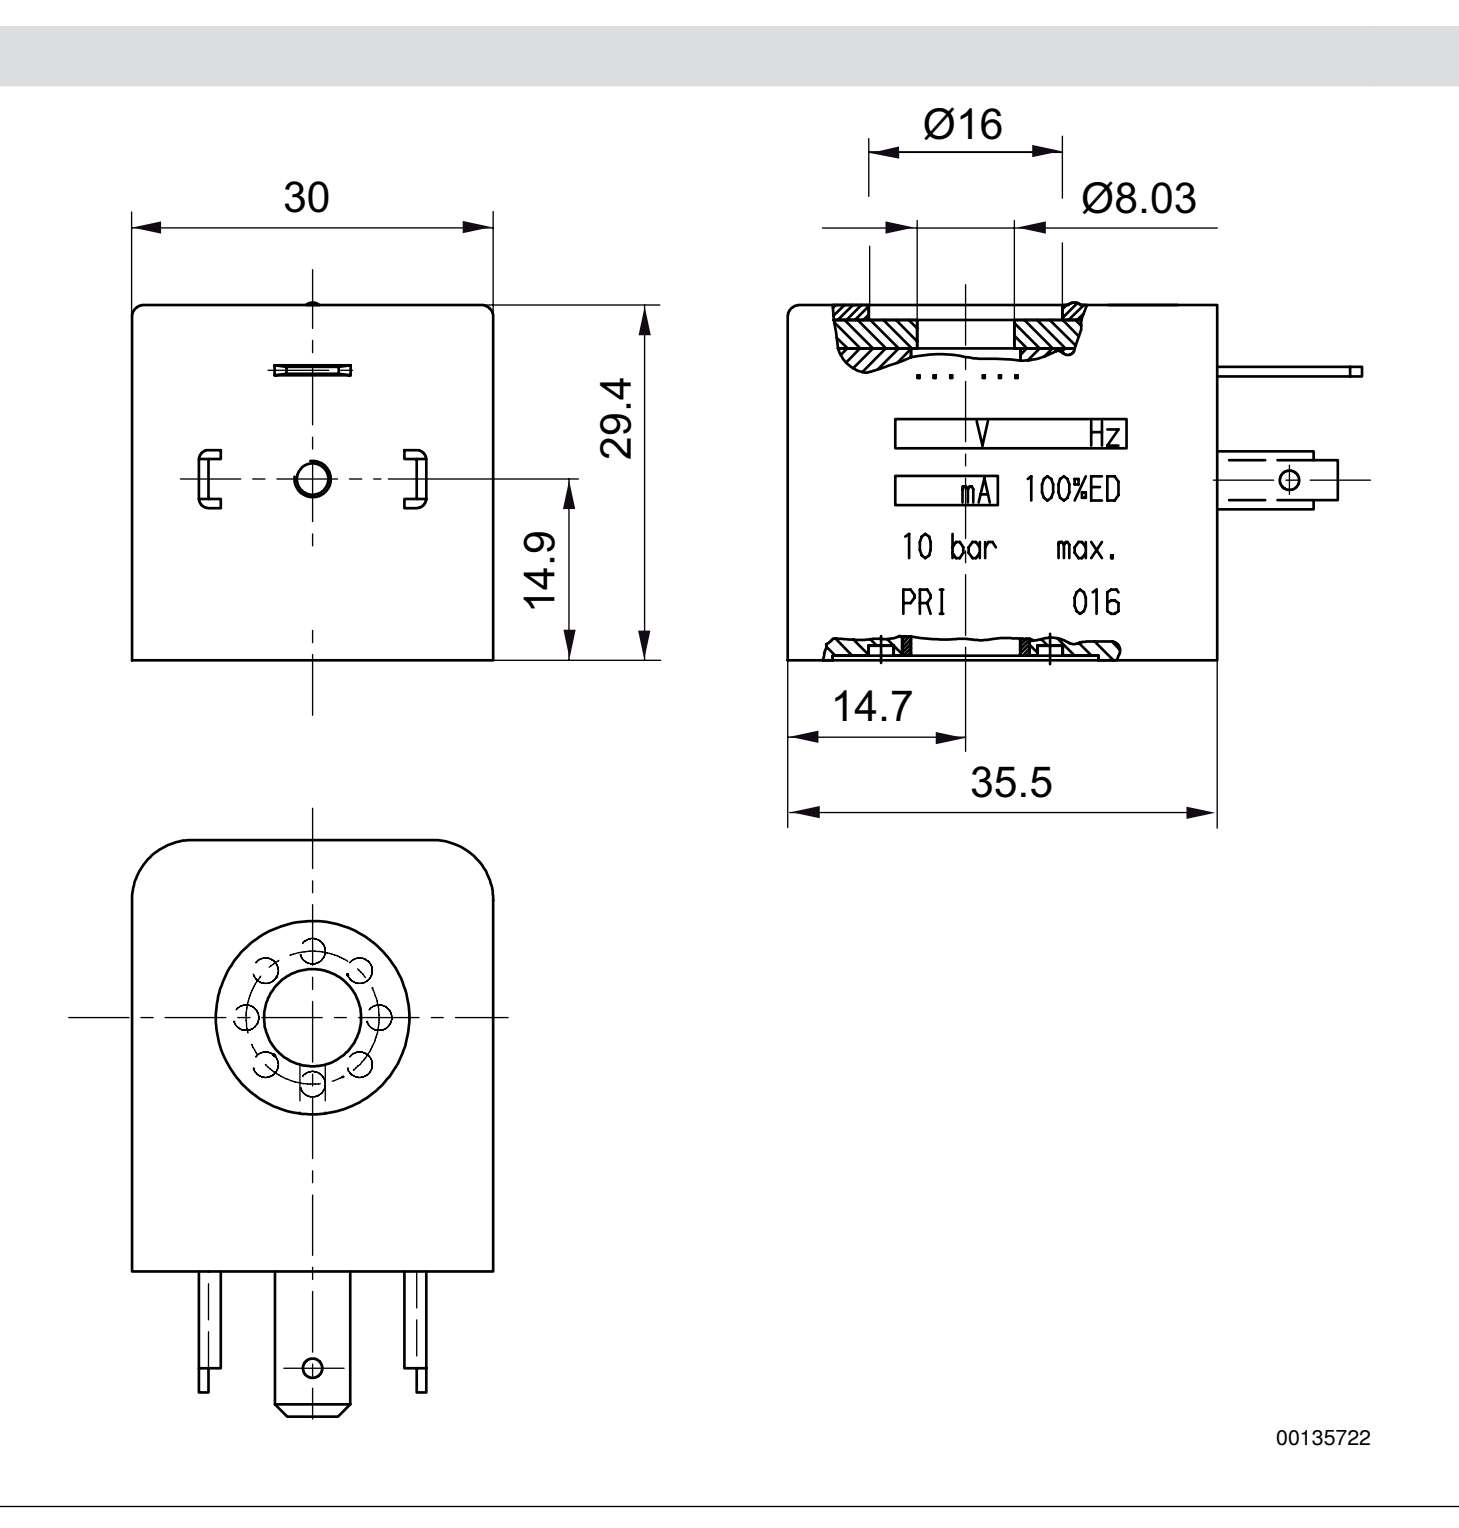

换向阀 → 线圈

线圈, 系列 CO1

► 线圈宽度 22 mm ► B 型



00135726

标准化电路接口	EN 175301-803, B型
电路接口	多芯插头
环境温度 最小值/最大值	-- / +50°C
防护等级 带有接线盒 / 插头	IP 65
暂载率ED	100 %

材料:

外壳	热塑性橡胶

额定电压			电压容许误差			功率消耗	启动功率		保持功率	
DC	AC 50 Hz	AC 60 Hz	DC	AC 50 Hz	AC 60 Hz	DC	AC 50 Hz	AC 60 Hz	AC 50 Hz	AC 60 Hz
						W	VA	VA	VA	VA
24 V	-	-	-10% / +10%	-10% / +10%	-10% / +10%	2,6	-	-	-	-
12 V	24 V	24 V	-10% / +10%	-10% / +10%	-10% / +10%	5,5	12	9,9	8,9	7,3
24 V	48 V	48 V	-10% / +10%	-10% / +10%	-10% / +10%	4,8	10,5	9,4	7,7	6,2
48 V	-	-	-10% / +10%	-10% / +10%	-10% / +10%	5	-	-	-	-
60 V	110 V	110 V	-10% / +10%	-10% / +10%	-10% / +10%	5,9	11	9,4	8,4	6,8
110 V	220 V	230 V	-10% / +10%	-10% / +10%	-10% / +10%	4,9	12,6	10,2	9,7	7,9
24 V	-	-	-10% / +10%	-10% / +10%	-10% / +10%	6	-	-	-	-


	额定电压			兼容性目录	重量	产品代码
	DC	AC 50 Hz	AC 60 Hz			
					[kg]	
	24 V	-	-	13		**1824210245**
	12 V	24 V	24 V	14		**1824210239**
	24 V	48 V	48 V	14		**1824210243**
	48 V	-	-	14	0,07	**1824210241**
	60 V	110 V	110 V	14		**1824210237**
	110 V	220 V	230 V	14		**1824210235**
	24 V	-	-	15		**1824210244**

换向阀 → 线圈

线圈, 系列 CO1

► 线圈宽度 22 mm ► B 型

规格

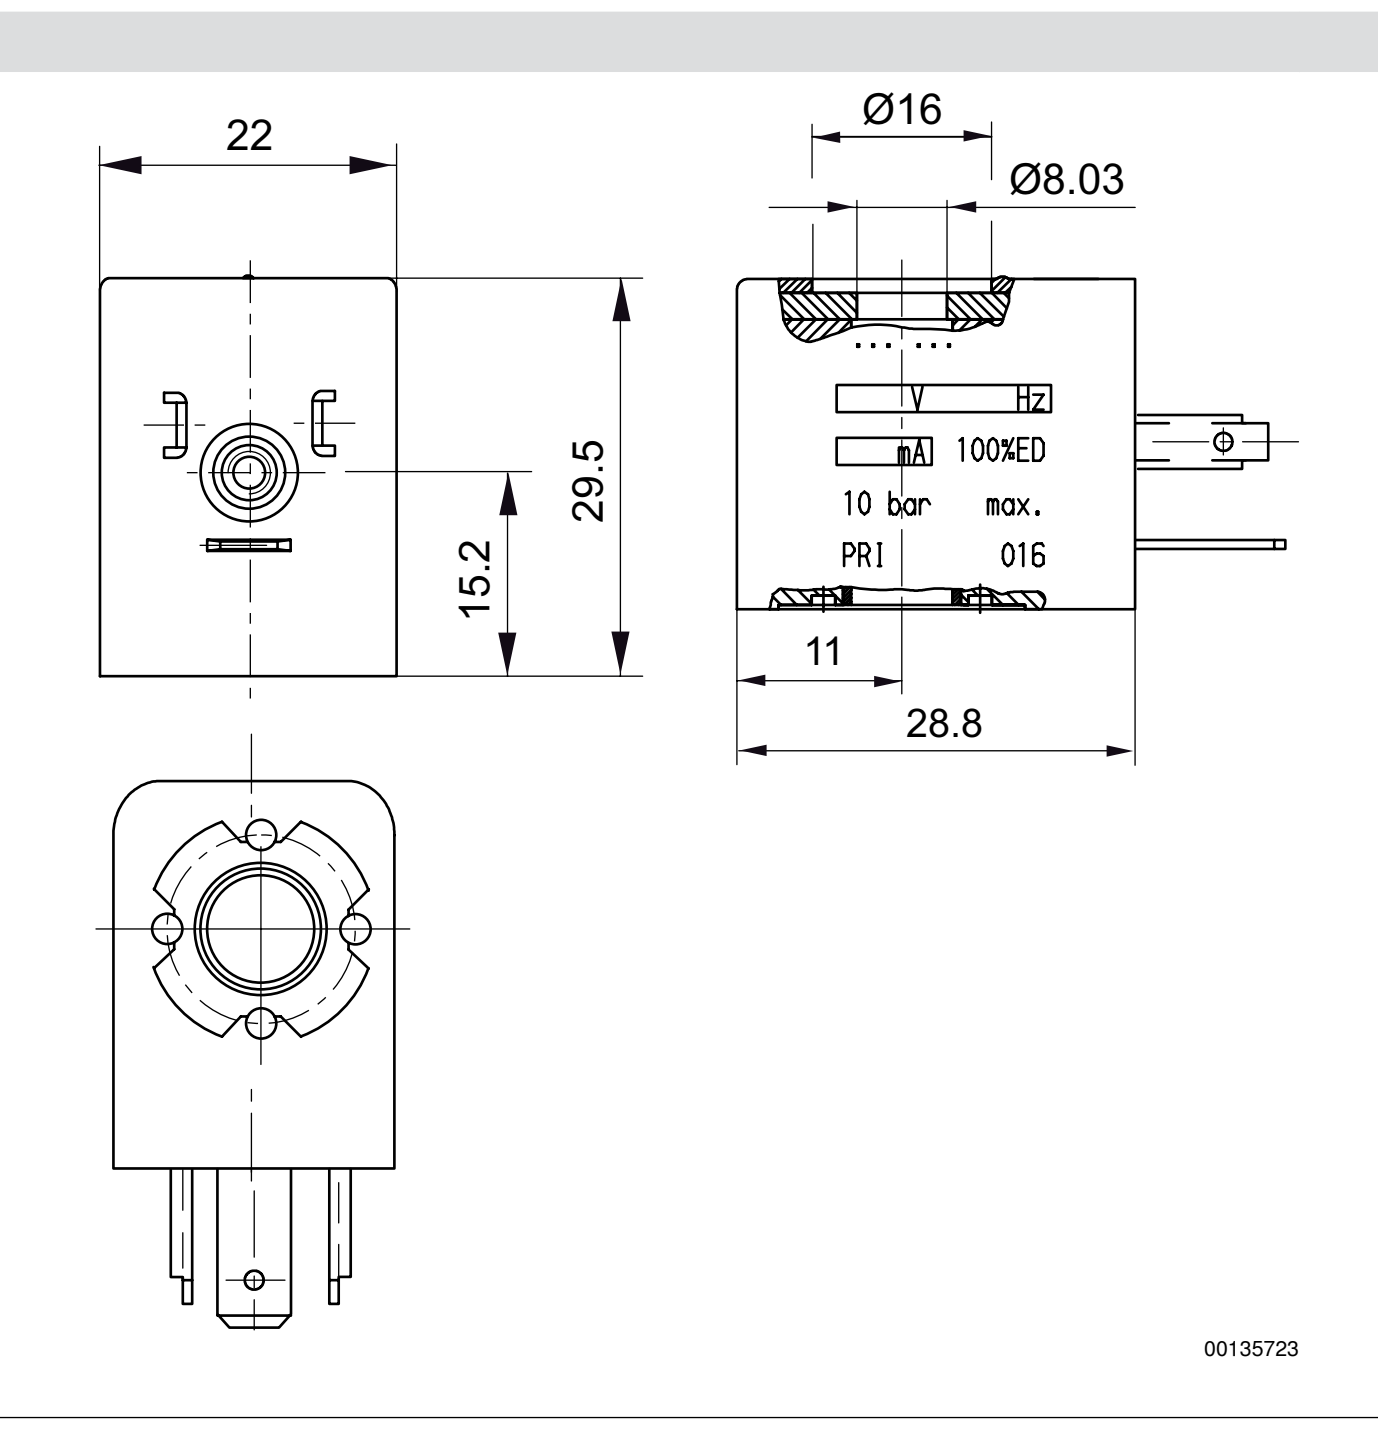



Bosch Rexroth AG
Pneumatics
Ulmer Straße 4
D - 30880 Laatzen
Phone +49 511 2136 - 0
Fax +49 511 2136 - 2 69
sales-pneumatics@boschrexroth.de
www.boschrexroth.com/pneumatics

Your contact:

香港博世力士乐(中国)有限公司
上海代表处
中国上海市浦东大道1号中国船舶
大厦4楼
邮编: 200120
电话: (86-21) 3866 6000
传真: (86-21) 3866 6111

博世力士乐(中国)有限公司
香港办事处
香港九龙长沙湾长顺街19号
杨耀松第六工业大厦1楼
电话: (852) 2262 5100
传真: (852) 2786 0733

香港博世力士乐(中国)有限公司
北京代表处
中国北京经济技术开发区永昌南
路6号
邮编: 100176
电话: (86-10) 6782 7000
传真: (86-10) 6782 7020

香港博世力士乐(中国)有限公司
大连代表处
中国大连市西岗区新开路99号
珠江国际大厦2005室
邮编: 116011
电话: (86-411) 8368 2602
传真: (86-411) 8368 2702

香港博世力士乐(中国)有限公司
广州代表处
中国广州市开发区科学城光谱西路
邮编: 510663
电话: (86-20) 3229 9551
传真: (86-20) 3229 9528

博世力士乐(中国)有限公司
成都代表处
中国成都市顺城大街308号
冠城广场21楼B-C座
邮编: 610017
电话: (86-28) 8652 7550
传真: (86-28) 8652 7123

博世力士乐(常州)有限公司
中国江苏常州市武进区人民东路
16号
邮编: 213161
电话: (86-519) 8175 000
传真: (86-519) 8175 088

博世力士乐(北京)液压有限公司
中国北京经济技术开发区永昌南
路6号
邮编: 100176
电话: (86-10) 6782 7000
传真: (86-10) 6782 7020

上海博世力士乐液压及自动化有
限公司
中国上海市外高桥保税区富特东
一路122号
邮编: 200131
电话: (86-21) 5866 3030
传真: (86-21) 5866 5523

上海博世力士乐液压及自动化有
限公司
金桥分公司
中国上海市金桥出口加工区金皖
路55号
邮编: 201206
电话: (86-21) 3866 6333
传真: (86-21) 3866 6222

further contacts:
www.boschrexroth.com/addresses

The data specified above only serve to describe the product. No statements concerning a certain condition or suitability for a certain application can be derived from our information. The information given does not release the user from the obligation of own judgment and verification. It must be remembered that our products are subject to a natural process of wear and aging.

Subject to modifications.

Online-PDF
05-11-2011